



SPR-100 Ultra 120W 12V Black-Frame

Art-No: 3-01-001520

Maximum Performance

important features

- Above-average solar yield on the smallest area: 120W with smallest dimensions
- 1000-times proven technology and quality
- patented Back-Contact-Cell technology
- groundbreaking module efficiency and solid light characteristics
- universally applicable in private and commercial projects

Technical Data

Article number:	3-01-001520
EAN:	4250983241242
manufacturer part no:	001520
System voltage:	12V / DC
Module voltage(Vmp):	19,8V
Generator power(Wp):	120W
max. current(Imp):	6,05A
Open circuit voltage(Voc):	23,35V
Short circuit current(Isc):	6,41A
max. string voltage:	600V DC
Cell type	monocrystalline SPR Cells
Ambient temperature:	-40°C - +85°C
Temperature Coefficient V:	-0,36%/°C
Temperature Coefficiency-A:	+0,07%/°C
Temperature Coefficient W:	-0,38%/°C
Dimensions (LxBxH):	1055 x 540 x 35mm
Gewicht:	6,5 kg



About us

Offgridtec GmbH
Im Gewerbepark 11
84307 Eggenfelden

Contact

Tel +49 8721 91994-00
Mail info@offgridtec.com

Onlineshop

www.offgridtec.com



Download on the
App Store



GET IT ON
Google Play






SPR-100 Ultra 120W 12V Black-Frame

Art-No: 3-01-001520

Specifications

Cell size:	125 x 125mm 4
Cell arrangement:	x 8 Sunpower
Cell-Fabricant:	Corp. IP67,
Protection class of junction box:	waterproof
Bypass diodes:	1
Solar plug type:	MC4
Length of connection cables:	90cm
Mounting type:	ABS spoiler or rail system

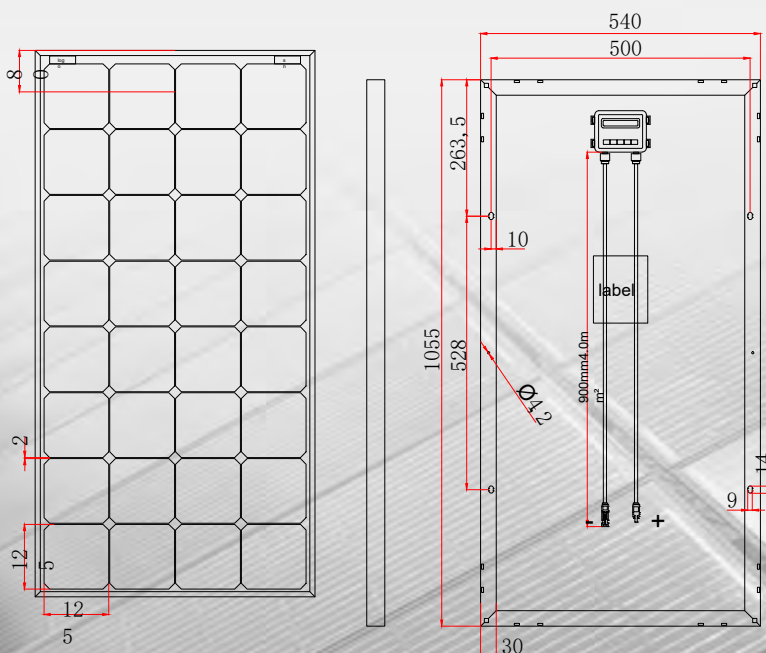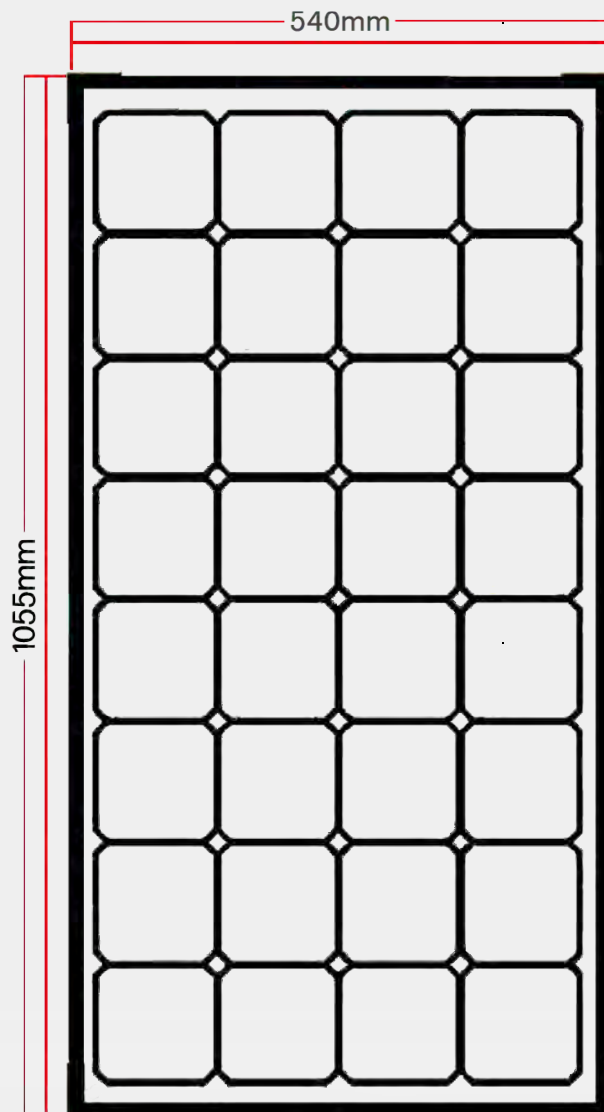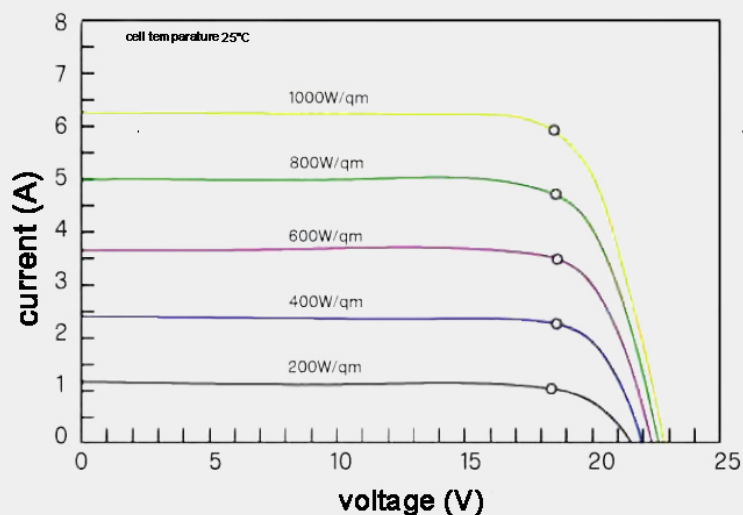

About us

Offgridtec GmbH
Im Gewerbpark 11
84307 Eggenfelden

Contact

Tel +49 8721 91994-00
Mail info@offgridtec.com

Onlineshop

www.offgridtec.com



Download on the
App Store



GET IT ON
Google Play